
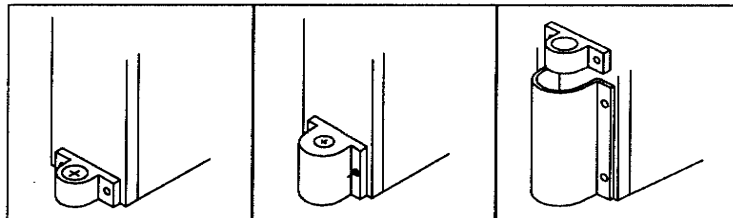


RUBBAIR DOOR

poly-kor™ model

Specifications: 1 3/4" insulated, Semi-flexible

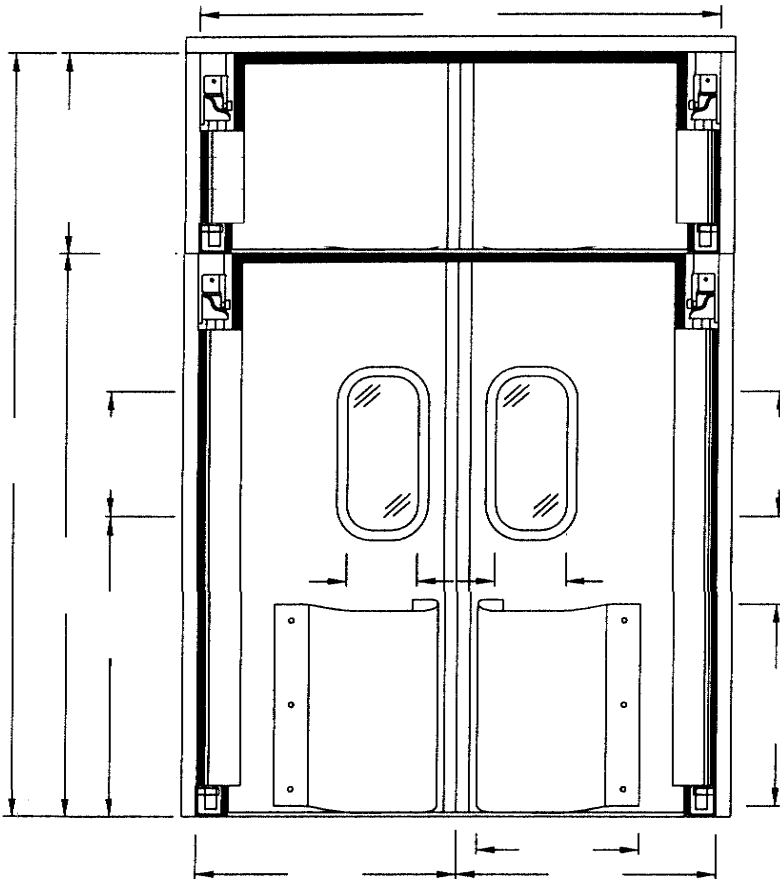

Bottom Bearing

Combo Bottom Bearing/
Jamb Guard

8 3/4" Jamb Guard
with Bottom Bearing

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

7.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Order Number: _____

Date: ____ / ____ / ____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ Pair / Single

Net Opening: _____" Wide _____" High

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue,
Cocoa, Chocolate, Beige, Red, Burgundy, White,
Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS

- | 24" Wide | 42" Wide |
|----------------------------|-------------------------------------|
| <input type="checkbox"/>] | <input type="checkbox"/>] 12" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 18" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 24" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 36" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 48" High |

IMPACT PANELS

- _____ " High
-] Option:
Wrap Around

LOWER HINGE

Bottom Bearing is standard

-] 8 3/4" High x 3" Deep Jamb Guard
-] Combo Bottom Bearing/Jamb Guard

WINDOW SIZES (Dual Pane)

10 1/2" x 23" is standard

-] 7 1/2" x 10 1/2"
-] 11 1/2" x 15 1/2"
-] 14" x 16"
-] 16" x 18"
-] 24" x 24"
-] C Frame, 1/4" Single Pane

Specify Size _____" W _____" H

FOR PRESSURE AND WIND LOADS

-] 4" Light Duty Spring
-] 4" Heavy Duty Spring
-] Spring Compensator

FLEXIBLE TRANSOMS, 1/4"

-] Specify Size _____" W _____" H

SEALS

Full Perimeter Air Seal is standard

-] Jamb & Header Seal Only

V-CAM OPTIONS

3/4" Rise 90° x 90° is standard

-] 1 1/2" Rise 90° x 90°
-] Deep Seat Cam 90° x 90°
-] 1 1/2" Rise 90° x 125° Spacer
-] 1 1/2" Rise 90° x 135° Angle
-] 1 1/2" Rise 90° x 180°

MOUNTING ACCESSORIES

-] Weld Plate
-] Mounting Strip
-] 2" x 6" Tubular Steel Frame, KD
- Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.