


RUBBAIR DOOR

TL-250 model

Specifications: 1/4" solid core, Semi-flexible

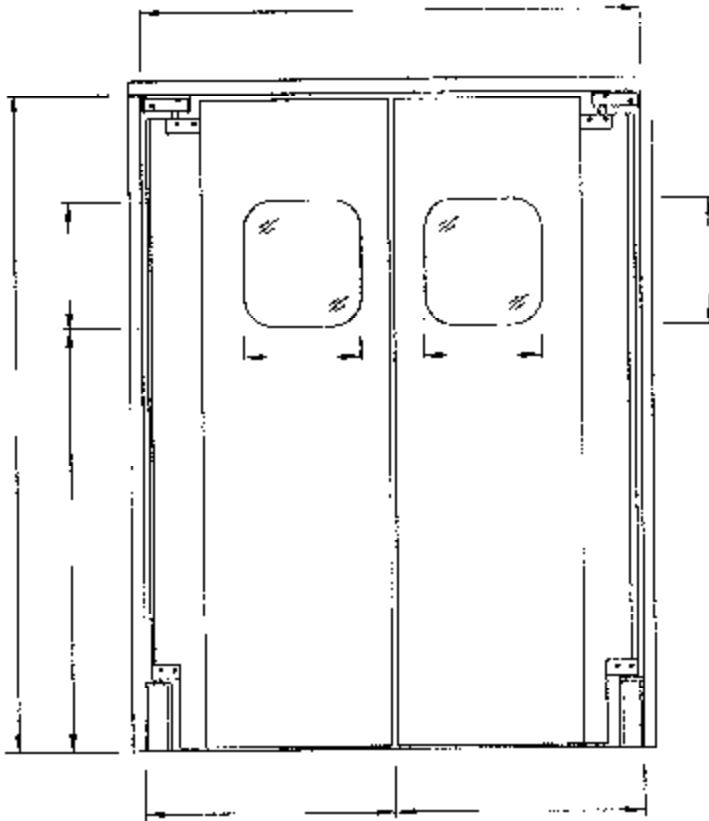

Impact Panels

SPECIAL OPTIONS / NOTES <hr/> <hr/> <hr/>
APPROXIMATE WEIGHT 3.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.
Approved: _____ Date: _____

Order Number: _____

Date: ____ / ____ / ____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ Pair / Single

Net Opening: _____" Wide _____" High

Cafe Undercut _____" Overcut _____"

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue, Cocoa, Chocolate, Beige, Red, Burgundy, White, Royal Blue, Green

DOOR FEATURES & OPTIONS

IMPACT PANELS

Vinyl _____" High

ABS _____" High

18 ga. Stainless Steel _____" High

LOWER HINGE

8 3/4" High Stainless Steel Jamb Guard is standard with E Z Hang Hinge

WINDOW SIZES (Single Pane)

7 1/2" x 10 1/2" (standard)

11" x 15"

14" x 16"

16" x 18"

SEALS

No Perimeter Air Seal is standard

INSTALLATION ACCESSORIES

Aluminum Frame

Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.

2" x 6" Tubular Steel Frame, KD

Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

E Z Hang Hinge requires a minimum double 2x4 wood jamb.