



vari-flex/flap-r door™ model

Specifications: Non-insulated, flexible

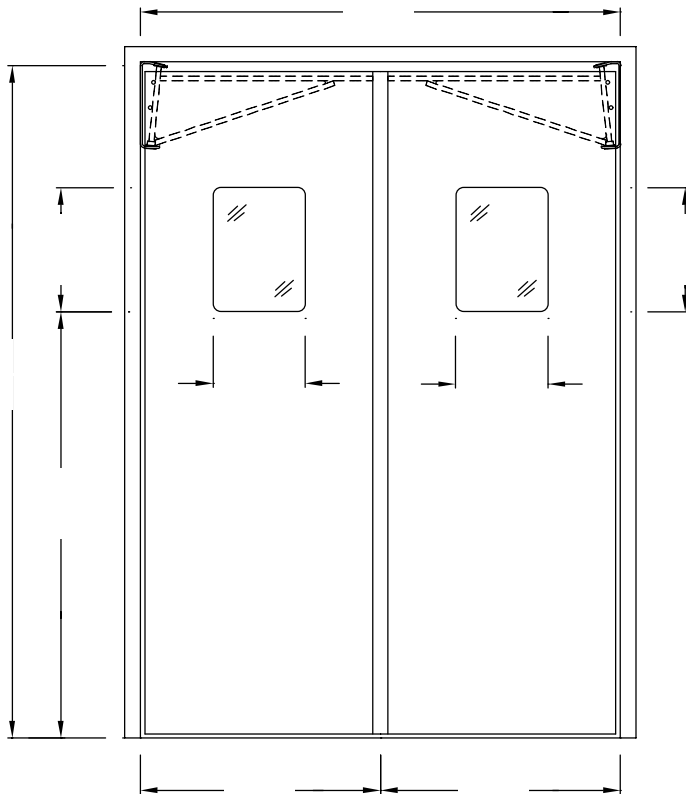

Impact Panels

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

2.75 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Order Number: _____

Date: ____ / ____ / ____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ Pair / Single

Net Opening: _____" Wide _____" High

[] Cafe Undercut _____" Overcut _____"

DOOR FEATURES & OPTIONS

DOOR MODEL

Model 150, 1/4" PVC Vinyl is standard

Colors: Gray Black Blue Brown
Beige Red Green

[] Model 180, 2 Layers of 40 oz Vinyl Fabric

Colors: Black Blue Brown Beige
Red Green

PVC IMPACT PANELS

No Impact Panels is standard

[] 12" High

[] 24" High

[] 36" High

[] 48" High

WINDOW SIZES

18" x 15" is standard

[] Full Width Vision

SEALS

No Perimeter Air Seal is standard

[] Top and Bottom Wipers

[] Jamb Edge Balloon Gaskets

INSTALLATION ACCESSORIES

[] Aluminum Frame

Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.

[] 2" x 6" Tubular Steel Frame, KD

Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

Vari-flex/Flap-R hinge requires a minimum double 2x4 wood jamb.