
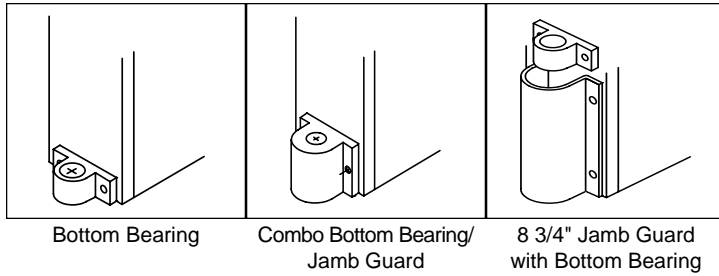


Order Number: _____

Date: ____ / ____ / ____

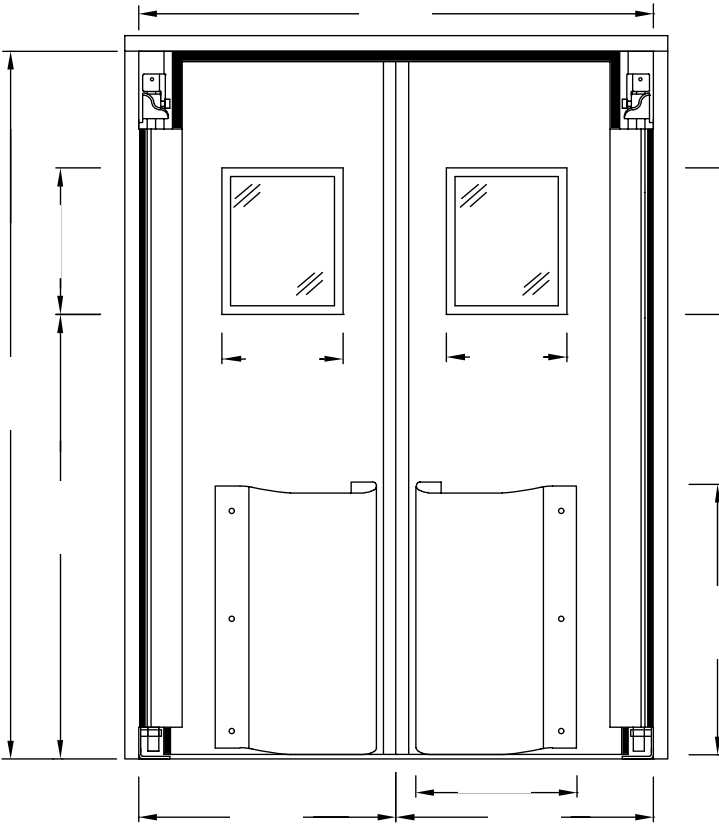

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

7.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____ " Wide _____ " High

COLOR SELECTION (Circle one)
 Cloud Gray, Charcoal Gray, Black, Cadet Blue,
 Cocoa, Chocolate, Beige, Red, Burgundy, White,
 Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS	IMPACT PANELS
24" Wide	42" Wide
[]	[] 12" High
[]	[] 18" High
[]	[] 24" High
[]	[] 36" High
[]	[] 48" High
	_____ " High
	[] Option: Wrap Around

LOWER HINGE
Bottom Bearing is standard

[] 8 3/4" High x 3" Deep Jamb Guard
 [] Combo Bottom Bearing/Jamb Guard

WINDOW SIZES (Dual Pane)
14" x 16" is standard

[] 7 1/2" x 10 1/2"
 [] 11 1/2" x 15 1/2"
 [] 14" x 16"
 [] 16" x 18"
 [] 24" x 24"
 [] C Frame, 1/4" Single Pane
 Specify Size _____ " W _____ " H

FOR PRESSURE AND WIND LOADS

[] 4" Light Duty Spring
 [] 4" Heavy Duty Spring
 [] Spring Compensator

FLEXIBLE TRANSOMS, 1/4"
 [] Specify Size _____ " W _____ " H

SEALS
Full Perimeter Air Seal is standard

[] Jamb & Header Seal Only

V-CAM OPTIONS
3/4" Rise 90° x 90° is standard

[] 1 1/2" Rise 90° x 90°
 [] Deep Seat Cam 90° x 90°
 [] 1 1/2" Rise 90° x 125° Spacer
 [] 1 1/2" Rise 90° x 135° Angle
 [] 1 1/2" Rise 90° x 180°

MOUNTING ACCESSORIES

[] Weld Plate
 [] Mounting Strip
 [] 2" x 6" Tubular Steel Frame, KD
 Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION
 V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.