
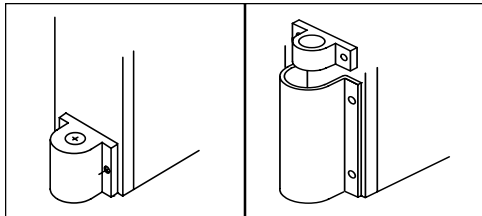


Order Number: _____

Date: ____ / ____ / ____

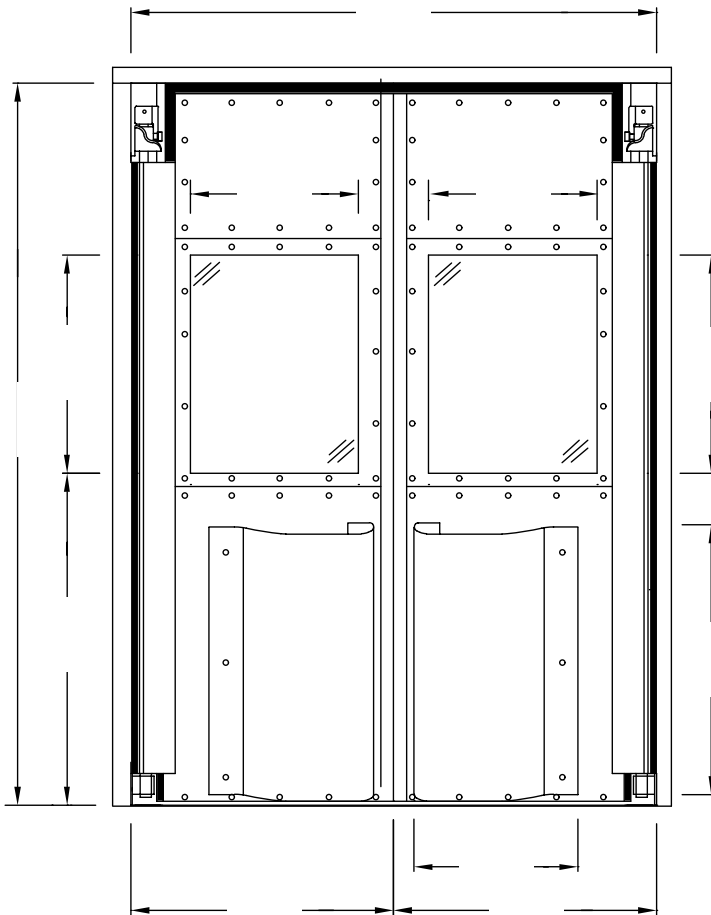

Combo Bottom Bearing/
Jamb Guard

8 3/4" Jamb Guard
with Bottom Bearing

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

7.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ **Pair / Single**

Net Opening: _____ " **Wide** _____ " **High**

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue,
Cocoa, Chocolate, Beige, Red, Burgundy, White,
Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS

24" Wide

42" Wide

42" High is standard

- [] 12" High
- [] 18" High
- [] 24" High
- [] 36" High

LOWER HINGE

Combo Bearing/Jamb Guard is standard

- [] 8 3/4" High x 3" Deep Jamb Guard

WINDOW SIZES (Dual Pane)

24" High x Full Width is standard

- [] 7 1/2" x 10 1/2"
- [] 11 1/2" x 15 1/2"
- [] 14" x 16"
- [] 16" x 18"
- [] 24" x 24"

FOR PRESSURE AND WIND LOADS

- [] 4" Light Duty Spring
- [] 4" Heavy Duty Spring
- [] Spring Compensator

FLEXIBLE TRANSOMS, 1/4"

- [] Specify Size _____" W _____" H

SEALS

Full Perimeter Air Seal is standard

- [] Jamb & Header Seal Only

V-CAM OPTIONS

1 1/2" Rise 90° x 90° is standard

- [] Deep Seat Cam 90° x 90°
- [] 3/4" Rise 90° x 90°
- [] 1 1/2" Rise 90° x 125° Spacer
- [] 1 1/2" Rise 90° x 135° Angle
- [] 1 1/2" Rise 90° x 180°

INSTALLATION ACCESSORIES

- [] Weld Plate
- [] Mounting Strip
- [] 2" x 6" Tubular Steel Frame, KD
Build rough opening 4 1/2" wider and 2 1/4"
taller than doors to accommodate frames.

JAMB CONSTRUCTION

V-Cam hinge requires a minimum 6" wide x 5/16"
thick steel channel jamb.