
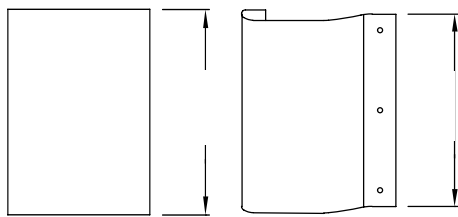


slen-dor™ model

Specifications: 3/4" solid core, Rigid

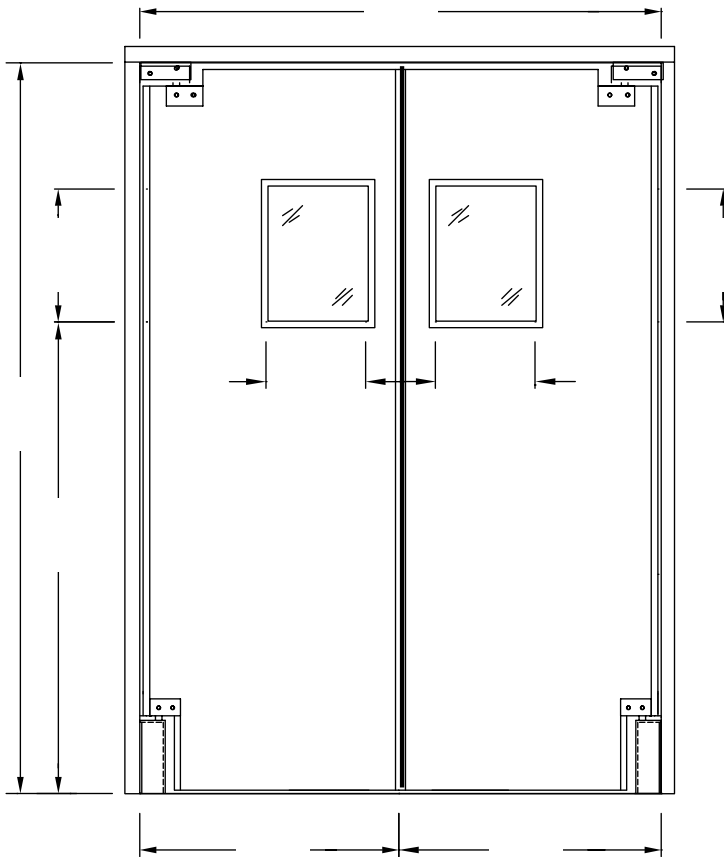

Impact Panels

Spring Bumpers

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

5.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Order Number: _____

Date: ____ / ____ / ____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____ / ____ / ____

Quantity: _____ **Pair / Single**

Net Opening: _____ " **Wide** _____ " **High**

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue, Cocoa, Chocolate, Beige, Red, Burgundy, White, Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS

- | 24" Wide | 42" Wide |
|------------------------------|---------------------------------------|
| <input type="checkbox"/> [] | <input type="checkbox"/> [] 12" High |
| <input type="checkbox"/> [] | <input type="checkbox"/> [] 18" High |
| <input type="checkbox"/> [] | <input type="checkbox"/> [] 24" High |
| <input type="checkbox"/> [] | <input type="checkbox"/> [] 36" High |
| <input type="checkbox"/> [] | <input type="checkbox"/> [] 48" High |

IMPACT PANELS

- [] Vinyl _____"High
- [] ABS _____"High
- [] 18 ga. Stainless Steel _____"High

LOWER HINGE

8 3/4" High Stainless Steel Jamb Guard is standard with EZ Hang Hinge

WINDOW SIZES (Dual Pane)

11 1/2" x 15 1/2" is standard

- [] 7 1/2" x 10 1/2"
- [] 14" x 16"
- [] 16" x 18"

SEALS

Non-Gasketed is standard

- [] Full Perimeter Gasketing

INSTALLATION ACCESSORIES

- [] Aluminum Frame
Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.
- [] 2" x 6" Tubular Steel Frame, KD
Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

EZ Hang hinge requires a minimum double 2x4 wood jamb.