
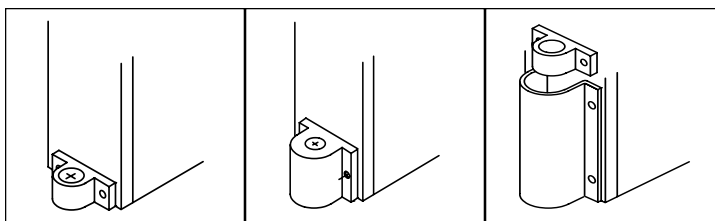


Order Number: _____

Date: ____ / ____ / ____

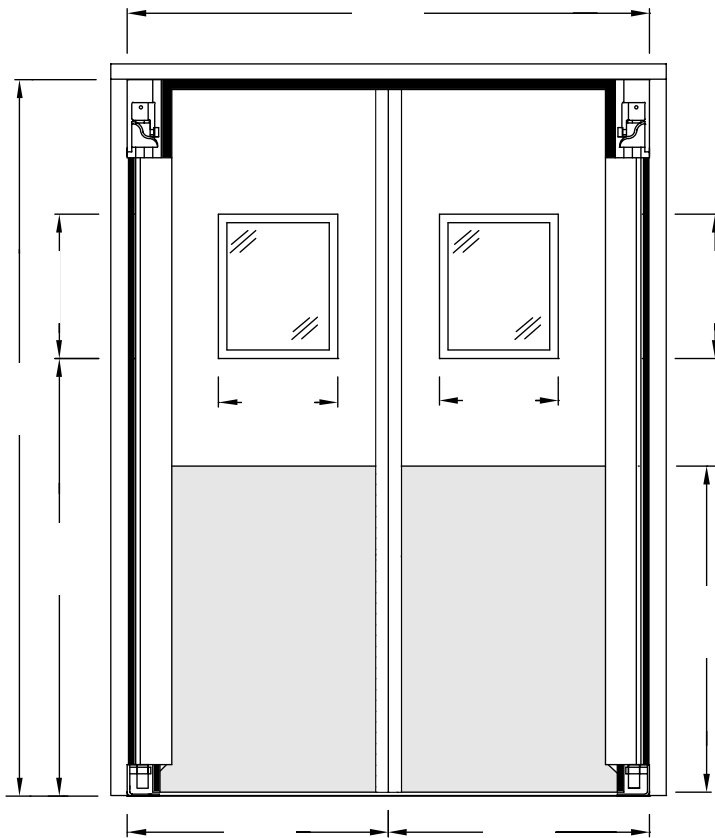

Bottom Bearing

Combo Bottom Bearing/
Jamb Guard

8 3/4" Jamb Guard
with Bottom Bearing

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

8.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____" **Wide** _____" **High**

COLOR SELECTION (Circle one)
 Black, Cloud Gray, Charcoal Gray, Cadet Blue,
 Cocoa, Chocolate, Beige, Red

DOOR FEATURES & OPTIONS

IMPACT PANELS

48" High Impact Panels standard

- No Impact Panels
- 24" High Impact Panels
- 48" High Wrap Around Impact Panels
- Option: Wrap Around

LOWER HINGE

Bottom Bearing is standard

- 8 3/4" Jamb Guard with Bottom Bearing
- Combo Bottom Bearing/Jamb Guard

WINDOW SIZES (Dual Pane)

14" x 16" is standard

- 7 1/2" x 10 1/2"
 - 11 1/2" x 15 1/2"
 - 14" x 16"
 - 16" x 18"
 - 24" x 24"
 - C Frame, 1/4" Single Pane
- Specify Size _____" W x _____" H

FOR PRESSURE AND WIND LOADS:

- 4" Light Duty Spring
- 4" Heavy Duty Spring
- Adjustable Spring Compensator

FLEXIBLE TRANSOMS, 1/4"

- Specify Size _____" W x _____" H

SEALS

Full Perimeter Air Seal is standard

- Jamb & Header Seal Only

V-CAM OPTIONS

1 1/2" Rise 90° x 90° is standard

- Deep Seat Cam 90° x 90°
- 3/4" Rise 90° x 90°
- 1 1/2" Rise 90° x 125° Spacer
- 1 1/2" Rise 90° x 135° Angle
- 1 1/2" Rise 90° x 180°

INSTALLATION ACCESSORIES

- Weld Plate
 - Mounting Strip
 - 2" x 6" Tubular Steel Frame, KD
- Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.