
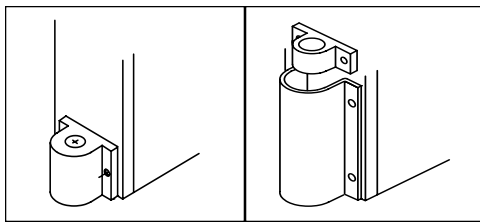


Order Number: _____

Date: ____ / ____ / ____

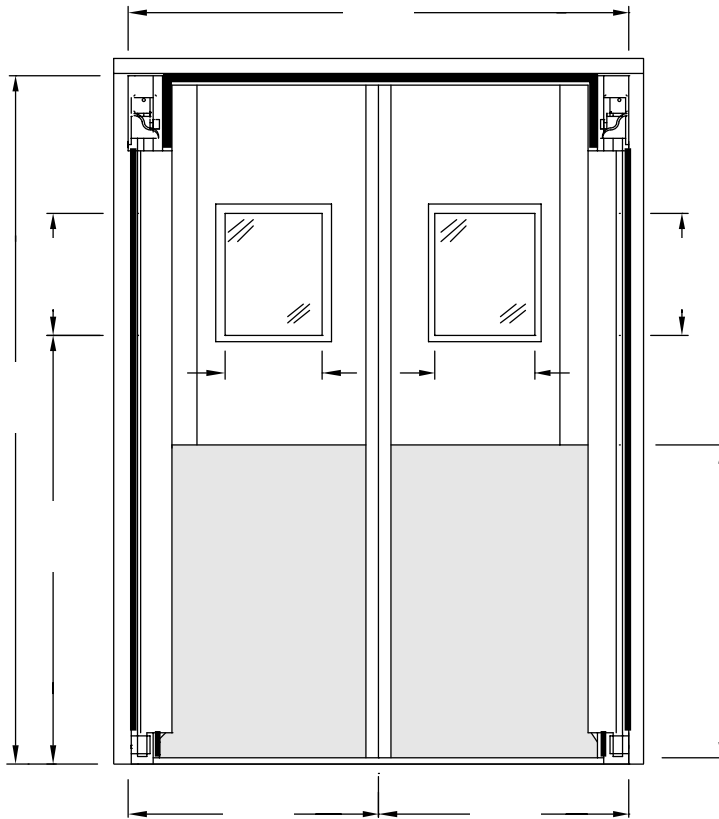

Combo Bottom Bearing/
Jamb Guard

8 3/4" Jamb Guard
with Bottom Bearing

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

9.0 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____" **Wide** _____" **High**

COLOR SELECTION (Circle one)
 Black, Cloud Gray, Charcoal Gray, Cadet Blue,
 Cocoa, Chocolate, Beige, Red

DOOR FEATURES & OPTIONS

- FLEX SHIELD** Option: [] Impact Panel [] Wrap Around
48" High Flex Shield is standard
 [] No Flex Shield
 [] 24" High Flex Shield
 [] 24" High Impact Panels
 [] 48" High Impact Panels

- LOWER HINGE**
Combo Bearing/Jamb Guard is standard
 [] 8 3/4" Jamb Guard with Bottom Bearing

- WINDOW SIZES** (Dual Pane)
14" x 16" is standard
 [] 7 1/2" x 10 1/2"
 [] 11 1/2" x 15 1/2"
 [] 14" x 16"
 [] 16" x 18"
 [] 24" x 24"
 [] C Frame, 1/4" Single Pane
 Specify Size _____" W _____" H

- FOR PRESSURE AND WIND LOADS**
 [] 4" Light Duty Spring
 [] 4" Heavy Duty Spring
 [] Spring Compensator

- FLEXIBLE TRANSOMS, 1/4"**
 [] Specify Size _____" W _____" H

- SEALS**
Full Perimeter Air Seal is standard
 [] Jamb & Header Seal Only

- V-CAM OPTIONS:**
1 1/2" Rise 90° x 90° is standard
 [] Deep Seat Cam 90° x 90°
 [] 3/4" Rise 90° x 90°
 [] 1 1/2" Rise 90° x 125° Spacer
 [] 1 1/2" Rise 90° x 135° Angle
 [] 1 1/2" Rise 90° x 180°

- INSTALLATION ACCESSORIES**
 [] Weld Plate
 [] Mounting Strip
 [] 2" x 6" Tubular Steel Frame, KD
 Build rough opening 4 1/2" wider and 2 1/4"
 taller than doors to accommodate frames.

JAMB CONSTRUCTION
 V-Cam hinge requires a minimum 6" wide x 5/16"
 thick steel channel jamb.