



Order Number: \_\_\_\_\_

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

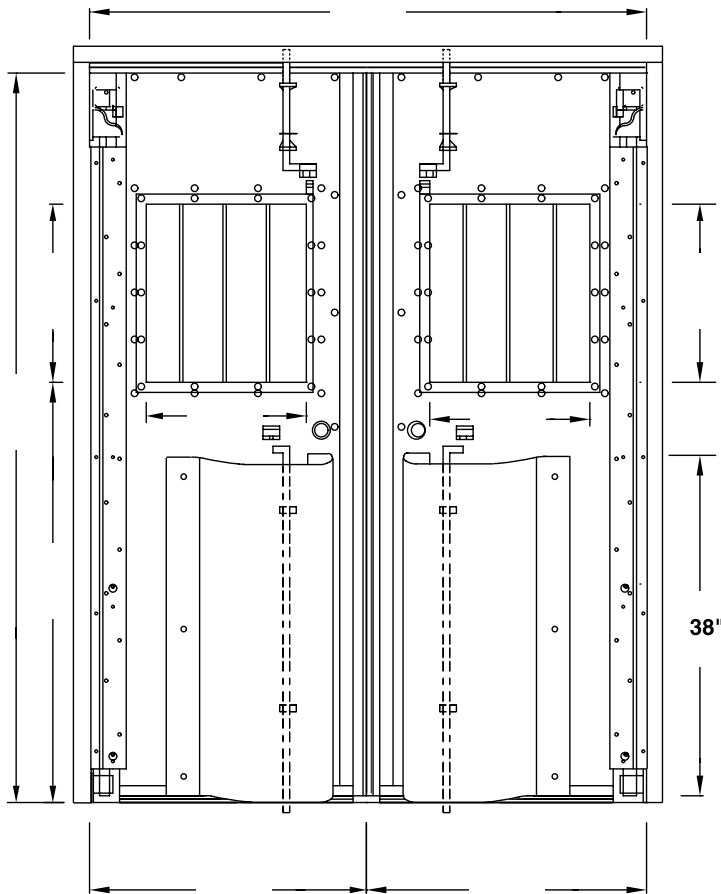

Combo Bottom Bearing/  
Jamb Guard

**SPECIAL OPTIONS / NOTES**

---



---



---



---

**APPROXIMATE WEIGHT**

10.0 lbs. per sq. ft. X \_\_\_\_\_ sq. ft. = \_\_\_\_\_ lbs.

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

**Sold To:** \_\_\_\_\_

**PO #:** \_\_\_\_\_

**Job Name:** \_\_\_\_\_

**Ship Week of:** \_\_\_\_ / \_\_\_\_ / \_\_\_\_

**Quantity:** \_\_\_\_\_ **Pair / Single**

**Net Opening:** \_\_\_\_\_ " Wide \_\_\_\_\_ " High

**STEEL-LITE RE-5 FEATURES**

- ◆ Insulated Foam Core.
- ◆ Galvanized door facing with galvanized cam shields.
- ◆ 38" high impact, low friction polyethylene bumpers, factory installed.
- ◆ Steel cane bolts top and bottom.
- ◆ 1/8" thick, double-glazed vision panels are U.L. listed as burglar resistant. Equipped with 5/8" diameter steel security rods.
- ◆ 2" I.D. locking bushings with air seals. (Chains by USPS)
- ◆ Low temperature, corrosion and crack resistant, light-weight steel facing.
- ◆ Detention grade low inertia hardware.
- ◆ Detention grade combination bottom bearing/jamb guard.
- ◆ Detention grade tamper-proof fasteners.
- ◆ Full Perimeter Air Seals.
- ◆ Hold open pins.

**OPTIONAL FEATURES**

- [ ] Dirt Free Retainer Sleeves
- [ ] Overhead Door Stops

**INSTALLATION ACCESSORIES**

- [ ] Weld Plate
- [ ] 2" x 6" Tubular Steel Frame, KD  
Build rough opening 4 1/2" wider and 2 1/2" taller than doors to accommodate frames.

**V-CAM HINGE**

**3/4" Rise 90° x 90° is standard**

- [ ] ABS COVERING  
(in place of galvanized sheet metal)

**ABS COLOR SELECTION (Circle One)**

Cloud Gray, Charcoal Gray, Black, Cadet Blue, Cocoa, Chocolate, Beige, Red, Burgundy, White, Royal Blue, Green

**JAMB CONSTRUCTION**

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.