



## TL-250™ model

Specifications: 1/4" solid core, Semi-flexible

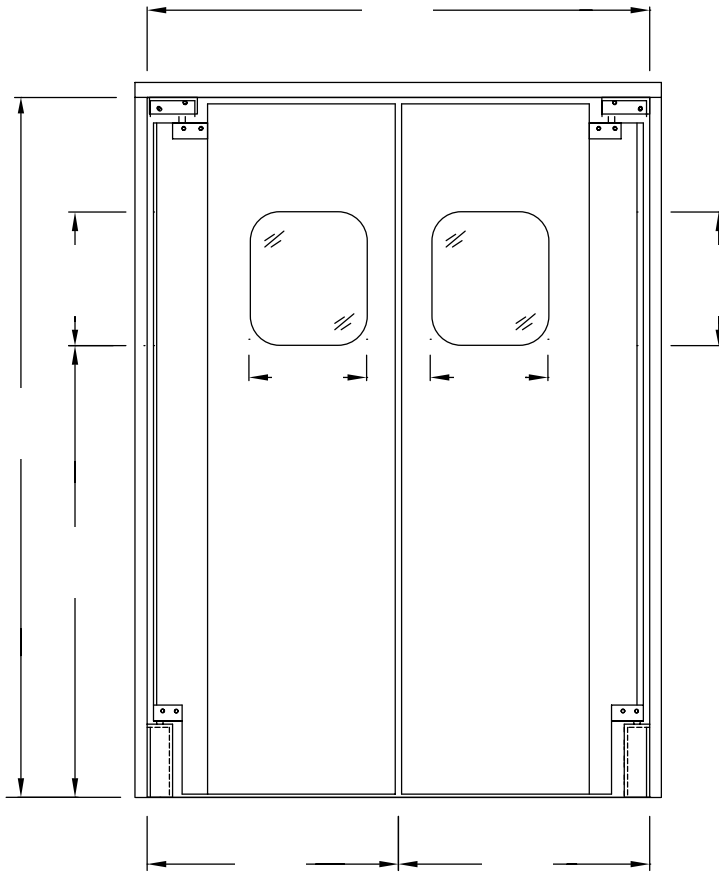

Impact Panels

**SPECIAL OPTIONS / NOTES**

---



---



---



---

**APPROXIMATE WEIGHT**

3.0 lbs. per sq. ft. X \_\_\_\_\_ sq. ft. = \_\_\_\_\_ lbs.

Approved: \_\_\_\_\_ Date: \_\_\_\_\_

Order Number: \_\_\_\_\_

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

Sold To: \_\_\_\_\_

PO #: \_\_\_\_\_

Job Name: \_\_\_\_\_

Ship Week of: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

Quantity: \_\_\_\_\_ Pair / Single

Net Opening: \_\_\_\_\_" Wide \_\_\_\_\_" High

[ ] Cafe Undercut \_\_\_\_\_" Overcut \_\_\_\_\_"

**COLOR SELECTION** (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue, Cocoa, Chocolate, Beige, Red, Burgundy, White, Royal Blue, Green

**DOOR FEATURES & OPTIONS**

**IMPACT PANELS**

[ ] Vinyl \_\_\_\_\_"High

[ ] ABS \_\_\_\_\_"High

[ ] 18 ga. Stainless Steel \_\_\_\_\_"High

**LOWER HINGE**

**8 3/4" High Stainless Steel Jamb Guard is standard with EZ Hang Hinge**

**WINDOW SIZES** (Single Pane)

[ ] 7 1/2" x 10 1/2" (standard)

[ ] 11" x 15"

[ ] 14" x 16"

[ ] 16" x 18"

**SEALS**

**No Perimeter Air Seal is standard**

**INSTALLATION ACCESSORIES**

[ ] Aluminum Frame

Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.

[ ] 2" x 6" Tubular Steel Frame, KD

Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

**JAMB CONSTRUCTION**

EZ Hang hinge requires a minimum double 2x4 wood jamb.