


Order Number: _____

Date: ____ / ____ / ____

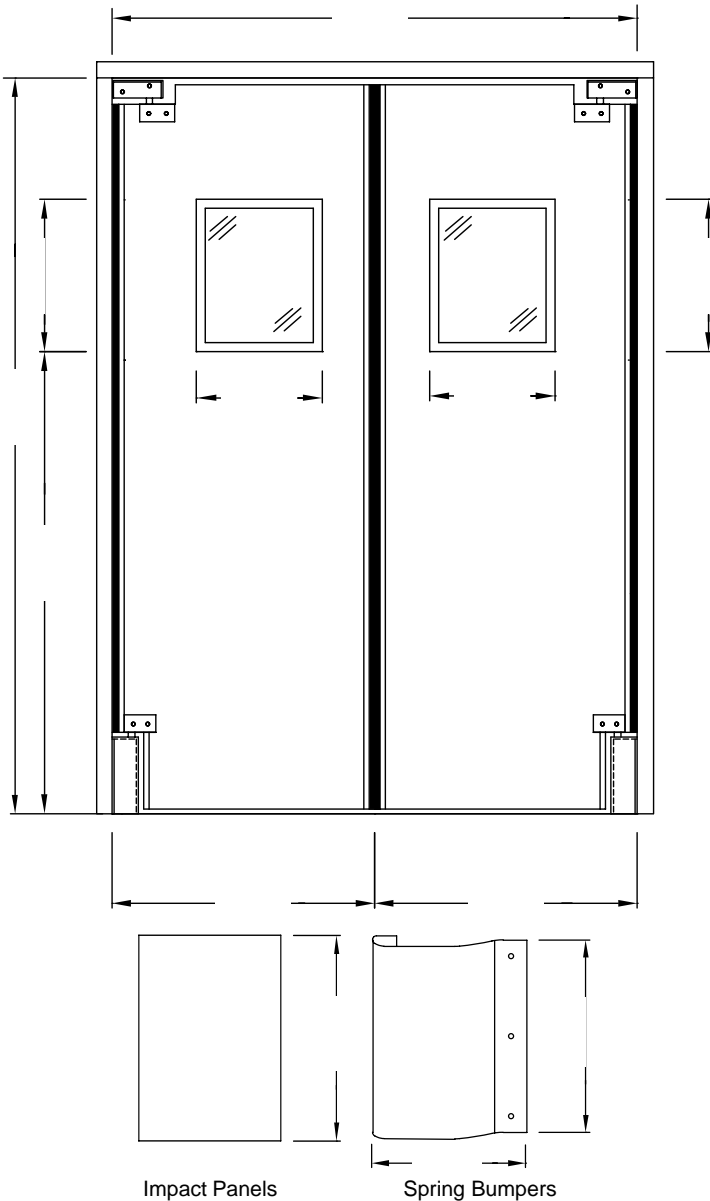

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____" **Wide** _____" **High**

COLOR SELECTION (Circle one)
 Cloud Gray, Charcoal Gray, Black, Cadet Blue,
 Cocoa, Chocolate, Beige, Red, Burgundy, White,
 Royal Blue, Green

DOOR FEATURES & OPTIONS

- SPRING BUMPERS**
- | | |
|----------------------------|-------------------------------------|
| 24" Wide | 42" Wide |
| <input type="checkbox"/>] | <input type="checkbox"/>] 12" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 18" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 24" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 36" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 48" High |

- IMPACT PANELS**
-] Vinyl _____"High
-] ABS _____"High
-] 18 ga. Stainless Steel _____"High

- LOWER HINGE**
- 8 3/4" High Stainless Steel Jamb Guard is standard with EZ Hang Hinge**
-] Combo Bottom Bearing/Jamb Guard
-] Standard Bottom Bearing

- WINDOW SIZES (Dual Pane)**
- 14" x 16" is standard**
-] 7" x 10"
-] 11 1/2" x 15 1/2"
-] 14" x 16"
-] 16" x 18"
-] 24" x 24"

- SEALS**
- Full Perimeter Gasketing is standard**
-] Jamb & Header Seal Only
- V-CAM OPTION** (In Place of EZ Hang Hinge)
-] 3/4" Rise 90° x 90°
- INSTALLATION ACCESSORIES**
-] Aluminum Frame
 Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames.
-] 2" x 6" Tubular Steel Frame, KD
 Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION

EZ Hang hinge requires a minimum double 2x4 wood jamb.

V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

3.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____