



Order Number: _____

Date: ____ / ____ / ____

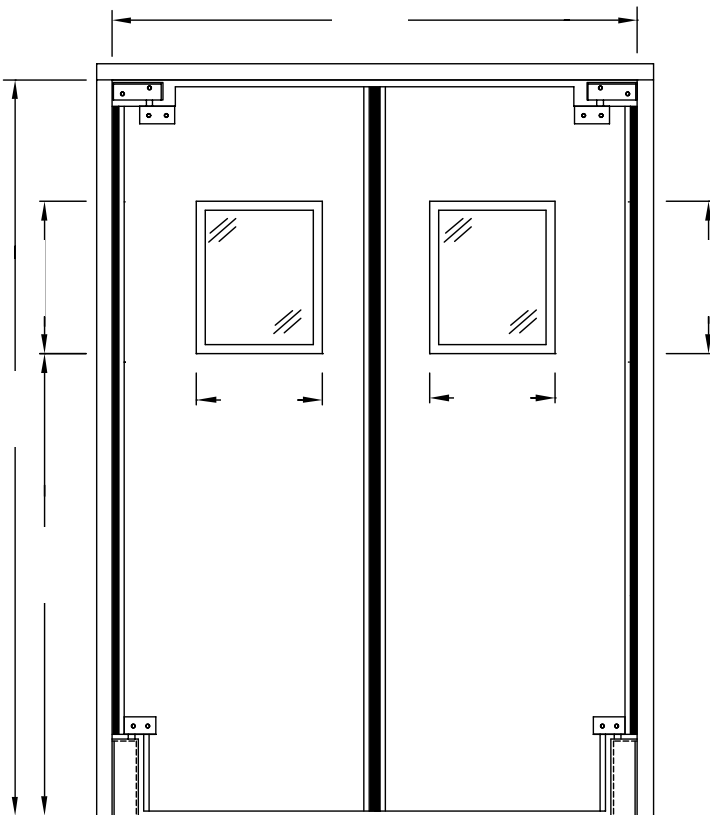

Impact Panels

Spring Bumpers

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

3.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____" **Wide** _____" **High**

COLOR SELECTION (Circle one)

Cloud Gray, Charcoal Gray, Black, Cadet Blue, Cocoa, Chocolate, Beige, Red, Burgundy, White, Royal Blue, Green

DOOR FEATURES & OPTIONS

SPRING BUMPERS

24" Wide

42" Wide

- | | |
|----------------------------|-------------------------------------|
| <input type="checkbox"/>] | <input type="checkbox"/>] 12" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 18" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 24" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 36" High |
| <input type="checkbox"/>] | <input type="checkbox"/>] 48" High |

IMPACT PANELS

- | | |
|---|-------------|
| <input type="checkbox"/>] Vinyl | _____ "High |
| <input type="checkbox"/>] ABS | _____ "High |
| <input type="checkbox"/>] 18 ga. Stainless Steel | _____ "High |

LOWER HINGE

8 3/4" High Stainless Steel Jamb Guard is standard with EZ Hang Hinge

- | |
|--|
| <input type="checkbox"/>] Combo Bottom Bearing/Jamb Guard |
| <input type="checkbox"/>] Standard Bottom Bearing |

WINDOW SIZES (Dual Pane)

14" x 16" is standard

- | |
|--|
| <input type="checkbox"/>] 7" x 10" |
| <input type="checkbox"/>] 11 1/2" x 15 1/2" |
| <input type="checkbox"/>] 14" x 16" |
| <input type="checkbox"/>] 16" x 18" |
| <input type="checkbox"/>] 24" x 24" |

SEALS

Full Perimeter Gasketing is standard

- | |
|--|
| <input type="checkbox"/>] Jamb & Header Seal Only |
|--|

V-CAM OPTION (In Place of EZ Hang Hinge)

- | |
|--|
| <input type="checkbox"/>] 3/4" Rise 90° x 90° |
|--|

INSTALLATION ACCESSORIES

- | | |
|--|--|
| <input type="checkbox"/>] Aluminum Frame | Build rough opening 1 1/4" wider and 5/8" taller than doors to accommodate frames. |
| <input type="checkbox"/>] 2" x 6" Tubular Steel Frame, KD | Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames. |

JAMB CONSTRUCTION

EZ Hang hinge requires a minimum double 2x4 wood jamb.
V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.