
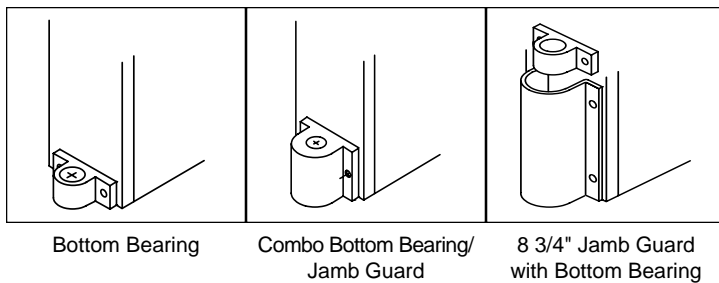


Order Number: _____

Date: ____ / ____ / ____

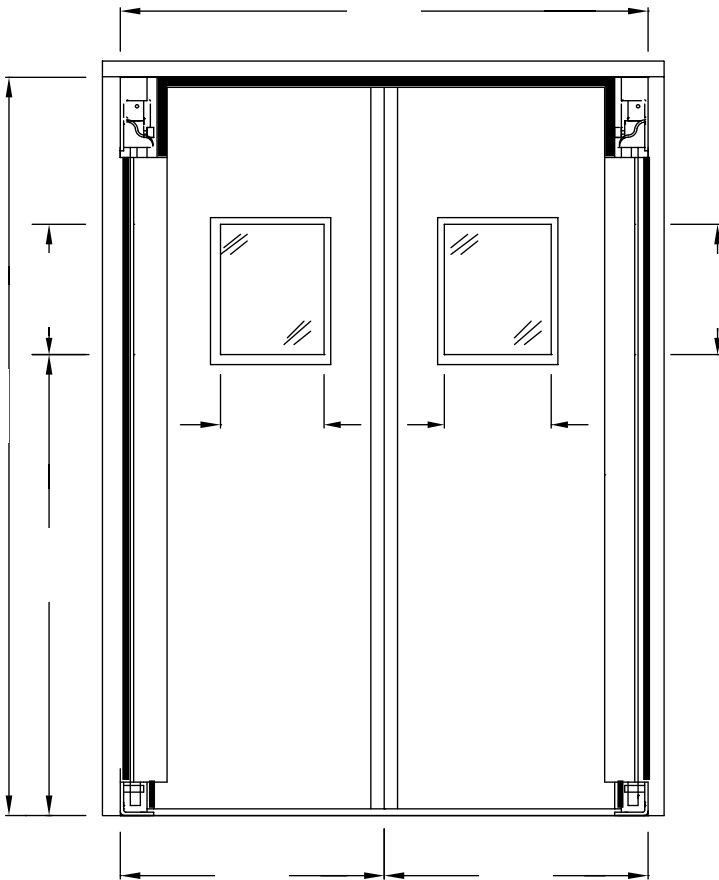

SPECIAL OPTIONS / NOTES

APPROXIMATE WEIGHT

7.5 lbs. per sq. ft. X _____ sq. ft. = _____ lbs.

Approved: _____ Date: _____

Sold To: _____

PO #: _____

Job Name: _____

Ship Week of: ____/____/____

Quantity: _____ **Pair / Single**

Net Opening: _____" **Wide** _____" **High**

COLOR SELECTION (Circle one)
 Black, Cloud Gray, Charcoal Gray, Cadet Blue, Cocoa, Chocolate, Beige, Red

DOOR FEATURES & OPTIONS

IMPACT PANELS Option: [] Wrap Around
No Impact Panels is standard
 [] 24" High Impact Panels
 [] 48" High Impact Panels

LOWER HINGE
Bottom Bearing is standard
 [] 8 3/4" Jamb Guard with Bottom Bearing
 [] Combo Bottom Bearing/Jamb Guard

WINDOW SIZES (Dual Pane)
14" x 16" is standard
 [] 7 1/2" x 10 1/2"
 [] 11 1/2" x 15 1/2"
 [] 14" x 16"
 [] 16" x 18"
 [] 24" x 24"
 [] C Frame, 1/4" Single Pane
 Specify Size _____" W _____" H

FOR PRESSURE AND WIND LOADS
 [] 4" Light Duty Spring
 [] 4" Heavy Duty Spring
 [] Spring Compensator

FLEXIBLE TRANSOMS, 1/4"
 [] Specify Size _____" W _____" H

SEALS
Full Perimeter Air Seal is standard
 [] Jamb & Header Seal Only

V-CAM OPTIONS
1 1/2" Rise 90° x 90° is standard
 [] Deep Seat Cam 90° x 90°
 [] 3/4" Rise 90° x 90°
 [] 1 1/2" Rise 90° x 125° Spacer
 [] 1 1/2" Rise 90° x 135° Angle
 [] 1 1/2" Rise 90° x 180°

INSTALLATION ACCESSORIES
 [] Weld Plate
 [] Mounting Strip
 [] 2" x 6" Tubular Steel Frame, KD
 Build rough opening 4 1/2" wider and 2 1/4" taller than doors to accommodate frames.

JAMB CONSTRUCTION
 V-Cam hinge requires a minimum 6" wide x 5/16" thick steel channel jamb.